




# 金属化聚丙烯膜抗干扰电容器(X2类, 275VAC/300VAC/310VAC) Metallized polypropylene film Interference Suppression capacitor (Class X2, 275VAC/300VAC/310VAC)

## 外观图 Outline Drawing

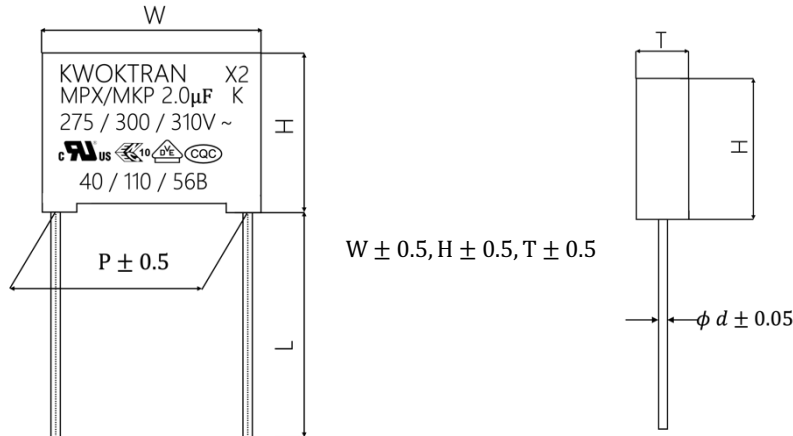

## 特点

- 金属化聚丙烯膜
- 能承受过压冲击
- 优异的阻燃性能
- 用于电源跨线路等抗干扰场合

## Features

- Metallized polypropylene film
- Withstanding overvoltage stressing
- Excellent active and passive flame-resistant abilities
- Used in across-the-line, interference suppression circuit

## 安全认证 Safety Approvals

■	CQC (中国)	■ CQC21001309196
■	ENEC-VDE (欧盟)	■ 40053558
■	UL/CUL (美国加拿大)	■ E523385

## 证书号 Certificate No.

## 技术要求 Specifications

引用标准 Reference Standard	IEC 60384-14 EN 60384-14	
气候类别 Climatic Category	40/110/56/B	
工作温度 Operating Temperature Range	-40°C ~110°C	
电容量范围 Capacitance Range	0.001μF~10μF	
电容量偏差 Capacitance Tolerance	±10%(K), ±20%(M)	
额定电压 Rated Voltage	275VAC/300VAC/310VAC	
损耗角正切 Dissipation Factor	≤0.1% (1KHz, 20~25°C)	
耐电压 Voltage Proof	引线之间 Between Terminals:	4.3U <sub>R</sub> (Vdc)(5-10s)
	极壳之间 Between Terminals To Case:	2050Vac, 1min
绝缘电阻 Insulation Resistance	$R \geq 15000M\Omega (C_N \leq 0.33\mu F)$ $RC_N \geq 5000s (C_N > 0.33\mu F)$ (100 ±10VDC / 1min / 20~25°C)	